



# SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

## xFusion


SPEChpc 2021\_tny\_base = 12.8

SPEChpc 2021\_tny\_peak = 15.4

FusionServer 2288H V6 (Intel Xeon Platinum 8380, Nvidia A100-PCIE-80G)

hpc2021 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Jul-2022  
Hardware Availability: Apr-2021  
Software Availability: May-2022

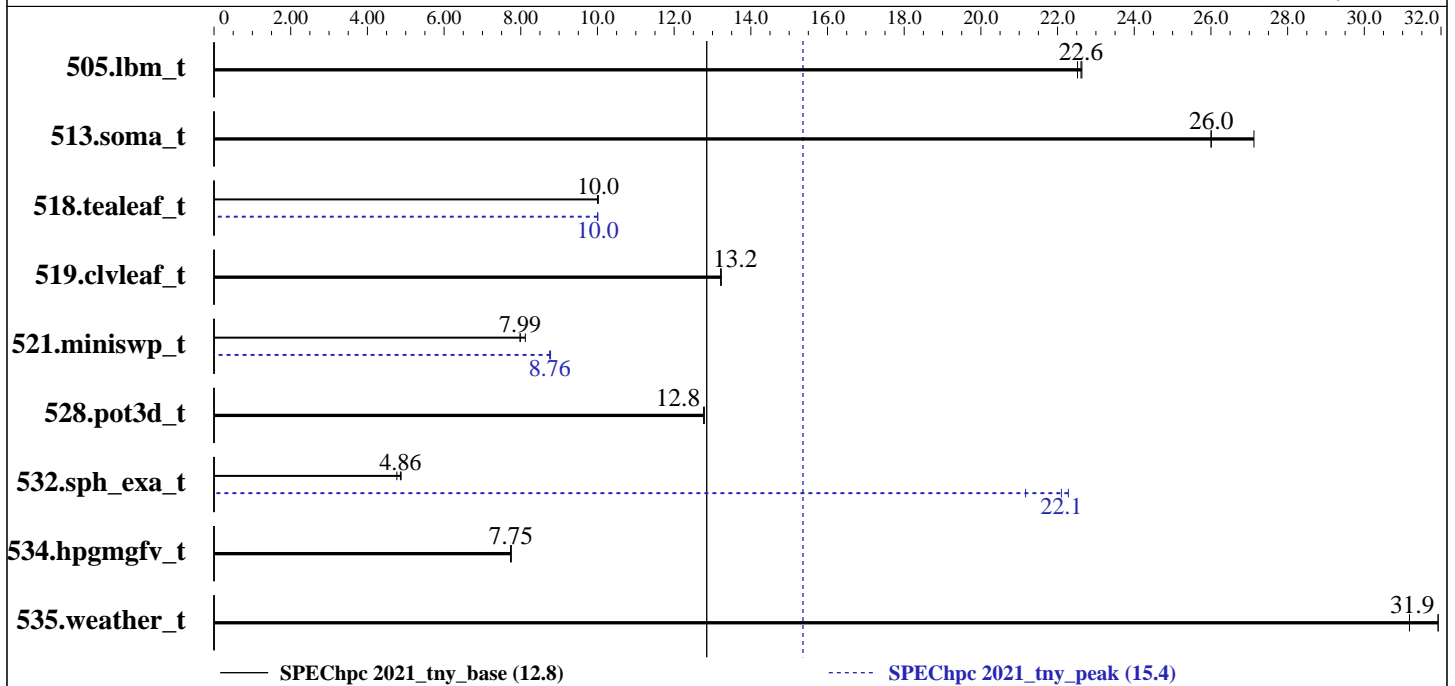

## Results Table

Benchmark	Base								Peak									
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	ACC	1	1	99.9	22.5	99.4	22.6	<b>99.5</b>	<b>22.6</b>	ACC	1	1	99.9	22.5	99.4	22.6	<b>99.5</b>	<b>22.6</b>
513.soma_t	ACC	1	1	136	27.1	142	26.0	<b>142</b>	<b>26.0</b>	ACC	1	1	136	27.1	142	26.0	<b>142</b>	<b>26.0</b>
518.tealeaf_t	ACC	1	1	165	10.0	165	10.0	<b>165</b>	<b>10.0</b>	ACC	1	1	165	10.0	165	10.0	<b>165</b>	<b>10.0</b>
519.cvlleaf_t	ACC	1	1	<b>125</b>	<b>13.2</b>	125	13.2	125	13.2	ACC	1	1	<b>125</b>	<b>13.2</b>	125	13.2	125	13.2
521.miniswp_t	ACC	1	1	197	8.12	200	7.98	<b>200</b>	<b>7.99</b>	ACC	1	1	183	8.76	182	8.78	<b>183</b>	<b>8.76</b>
528.pot3d_t	ACC	1	1	166	12.8	<b>166</b>	<b>12.8</b>	166	12.8	ACC	1	1	166	12.8	<b>166</b>	<b>12.8</b>	166	12.8
532.sph_exa_t	ACC	1	1	<b>401</b>	<b>4.86</b>	409	4.77	400	4.88	ACC	16	1	92.1	21.2	87.5	22.3	<b>88.2</b>	<b>22.1</b>
534.hpgmgfv_t	ACC	1	1	152	7.75	<b>152</b>	<b>7.75</b>	152	7.73	ACC	1	1	152	7.75	<b>152</b>	<b>7.75</b>	152	7.73
535.weather_t	ACC	1	1	101	31.9	<b>101</b>	<b>31.9</b>	103	31.2	ACC	1	1	101	31.9	<b>101</b>	<b>31.9</b>	103	31.2

SPEChpc 2021\_tny\_base = 12.8

SPEChpc 2021\_tny\_peak = 15.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

## xFusion

SPEChpc 2021\_tny\_base = 12.8

SPEChpc 2021\_tny\_peak = 15.4

FusionServer 2288H V6 (Intel Xeon Platinum 8380, Nvidia A100-PCIE-80G)

**hpc2021 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** May-2022

### Hardware Summary

Type of System: SMP  
Compute Node: FusionServer 2288H V6  
Interconnect: None  
Compute Nodes Used: 1  
Total Chips: 2  
Total Cores: 80  
Total Threads: 80  
Total Memory: 1 TB  
Max. Peak Threads: 1

### Software Summary

Compiler: Nvidia HPC SDK 22.5  
MPI Library: OpenMPI Version 4.0.5, included with NVHPC SDK  
Other MPI Info: --  
Other Software: --  
Base Parallel Model: ACC  
Base Ranks Run: 1  
Base Threads Run: 1  
Peak Parallel Models: ACC  
Minimum Peak Ranks: 1  
Maximum Peak Ranks: 16  
Max. Peak Threads: 1  
Min. Peak Threads: 1

## Node Description: FusionServer 2288H V6

### Hardware

Number of nodes: 1  
Uses of the node: compute  
Vendor: xFusion  
Model: FusionServer 2288H V6  
CPU Name: Intel Xeon Platinum 8380  
CPU(s) orderable: 1, 2 chips  
Chips enabled: 2  
Cores enabled: 80  
Cores per chip: 40  
Threads per core: 1  
CPU Characteristics: Intel Turbo Boost Technology up to 3.4 GHz  
CPU MHz: 2300  
Primary Cache: 32 KB I + 48 KB D on chip per core  
Secondary Cache: 1.25 MB I+D on chip per core  
L3 Cache: 60 MB I+D on chip per chip  
Other Cache: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200A-R)  
Disk Subsystem: 2 x 480 GB SATA 2.5" SSD (RAID 1)  
Other Hardware: None  
Accel Count: 2  
Accel Model: Tesla A100 PCIe 80GB  
Accel Vendor: Nvidia Corporation  
Accel Type: GPU  
Accel Connection: PCIe Gen4 x16  
Accel ECC enabled: Yes  
Accel Description: Nvidia Tesla A100 PCIe 80GB  
Adapter: None  
Number of Adapters: 0  
Slot Type: None  
Data Rate: None  
Ports Used: 0  
Interconnect Type: None

### Software

Accelerator Driver: NVIDIA UNIX x86\_64 Kernel Module 515.43.04  
Adapter: None  
Adapter Driver: None  
Adapter Firmware: None  
Operating System: CentOS Linux release 8.2.2004  
4.18.0-193.el8.x86\_64  
Local File System: xfs  
Shared File System: None  
System State: Multi-user, run level 3  
Other Software: None



# SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

## xFusion

SPEChpc 2021\_tny\_base = 12.8

SPEChpc 2021\_tny\_peak = 15.4

FusionServer 2288H V6 (Intel Xeon Platinum 8380, Nvidia A100-PCIE-80G)

**hpc2021 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** May-2022

### Interconnect Description: None

#### Hardware

#### Software

Vendor: None  
Model: None  
Switch Model: None  
Number of Switches: 0  
Number of Ports: 0  
Data Rate: None  
Firmware: None  
Topology: None  
Primary Use: None

: --

### Submit Notes

The config file option 'submit' was used.  
MPIRUN\_OPTS = --allow-run-as-root --bind-to none  
submit = mpirun --allow-run-as-root -x UCX\_MEMTYPE\_CACHE=n -np \$ranks perl \$[top]/bind.pl \$command

### Compiler Version Notes

=====  
CC 505.lbm\_t(base, peak) 513.soma\_t(base, peak) 518.tealeaf\_t(base, peak)  
521.miniswp\_t(base, peak) 534.hpgmgfv\_t(base, peak)  
-----

nvc 22.5-0 64-bit target on x86-64 Linux -tp skylake-avx512  
NVIDIA Compilers and Tools  
Copyright (c) 2022, NVIDIA CORPORATION & AFFILIATES. All rights reserved.  
-----

=====  
CXXC 532.sph\_exa\_t(base, peak)  
-----

nvc++ 22.5-0 64-bit target on x86-64 Linux -tp skylake-avx512  
NVIDIA Compilers and Tools  
Copyright (c) 2022, NVIDIA CORPORATION & AFFILIATES. All rights reserved.  
-----

=====  
FC 519.clvleaf\_t(base, peak) 528.pot3d\_t(base, peak) 535.weather\_t(base, peak)  
-----

nvfortran 22.5-0 64-bit target on x86-64 Linux -tp skylake-avx512  
NVIDIA Compilers and Tools  
Copyright (c) 2022, NVIDIA CORPORATION & AFFILIATES. All rights reserved.  
-----



# SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

## xFusion

SPEChpc 2021\_tny\_base = 12.8

SPEChpc 2021\_tny\_peak = 15.4

FusionServer 2288H V6 (Intel Xeon Platinum 8380, Nvidia A100-PCIE-80G)

**hpc2021 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** May-2022

## Base Compiler Invocation

C benchmarks:

`mpicc`

C++ benchmarks:

`mpicxx`

Fortran benchmarks:

`mpif90`

## Base Portability Flags

`532.sph_exa_t: --c++17`

## Base Optimization Flags

C benchmarks:

`-fast -acc=gpu -Mfprelaxed -Mnouniform -Mstack_arrays  
-DSPEC_ACCEL_AWARE_MPI`

C++ benchmarks:

`-fast -acc=gpu -Mfprelaxed -Mnouniform -Mstack_arrays  
-DSPEC_ACCEL_AWARE_MPI`

Fortran benchmarks:

`-DSPEC_ACCEL_AWARE_MPI -fast -acc=gpu -Mfprelaxed -Mnouniform  
-Mstack_arrays`

## Base Other Flags

C benchmarks:

`-w`

C++ benchmarks:

`-w`

Fortran benchmarks:

`-w`



# SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

## xFusion

SPEChpc 2021\_tny\_base = 12.8

SPEChpc 2021\_tny\_peak = 15.4

FusionServer 2288H V6 (Intel Xeon Platinum 8380, Nvidia A100-PCIE-80G)

**hpc2021 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** May-2022

## Peak Compiler Invocation

C benchmarks:

mpicc

C++ benchmarks:

mpicxx

Fortran benchmarks:

mpif90

## Peak Optimization Flags

C benchmarks:

505.lbm\_t: basepeak = yes

513.soma\_t: basepeak = yes

518.tealeaf\_t: -fast -Msafeptr -acc=gpu -DSPEC\_ACCEL\_AWARE\_MPI

521.miniswp\_t: -fast -acc=gpu -gpu=pinned

534.hpgmgfv\_t: basepeak = yes

C++ benchmarks:

-fast -acc=gpu -O3 -Mfprelaxed -Mnouniform -Mstack\_arrays  
-static-nvidia

Fortran benchmarks:

519.clvleaf\_t: basepeak = yes

528.pot3d\_t: basepeak = yes

535.weather\_t: basepeak = yes

## Peak Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

(Continued on next page)



# SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

## xFusion

SPEChpc 2021\_tny\_base = 12.8

SPEChpc 2021\_tny\_peak = 15.4

FusionServer 2288H V6 (Intel Xeon Platinum 8380, Nvidia A100-PCIE-80G)

**hpc2021 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** May-2022

## Peak Other Flags (Continued)

Fortran benchmarks:  
-w

The flags file that was used to format this result can be browsed at  
[http://www.spec.org/hpc2021/flags/nv2021\\_flags\\_v1.0.3.2022-08-24.html](http://www.spec.org/hpc2021/flags/nv2021_flags_v1.0.3.2022-08-24.html)

You can also download the XML flags source by saving the following link:  
[http://www.spec.org/hpc2021/flags/nv2021\\_flags\\_v1.0.3.2022-08-24.xml](http://www.spec.org/hpc2021/flags/nv2021_flags_v1.0.3.2022-08-24.xml)

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEChpc2021 v1.0.3 on 2022-07-09 05:53:50-0400.  
Report generated on 2022-08-24 18:40:47 by hpc2021 PDF formatter v1.0.3.  
Originally published on 2022-08-24.