



SPEChpc™ 2021 Tiny Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Supermicro


SPEChpc 2021_tny_base = 12.9

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9355)

SPEChpc 2021_tny_peak = 12.9

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2024
Hardware Availability: Oct-2024
Software Availability: Apr-2024

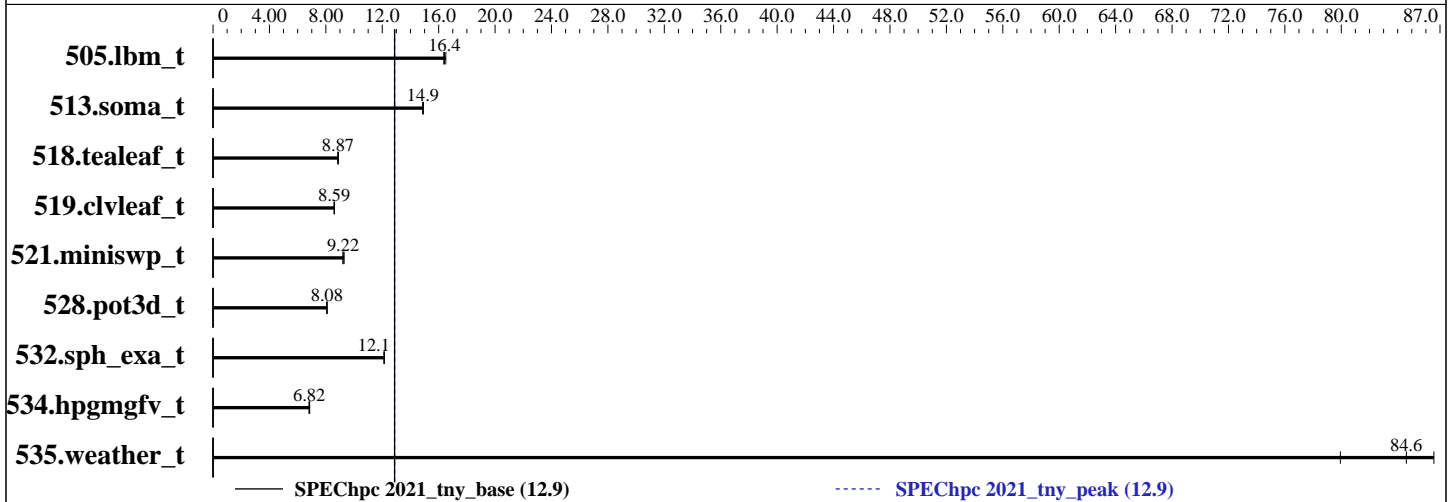

Results Table

Benchmark	Base										Peak							
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	OMP	16	8	<u>137</u>	<u>16.4</u>	138	16.4	136	16.5	OMP	16	8	<u>137</u>	<u>16.4</u>	138	16.4	136	16.5
513.soma_t	OMP	16	8	248	14.9	249	14.9	<u>248</u>	<u>14.9</u>	OMP	16	8	248	14.9	249	14.9	<u>248</u>	<u>14.9</u>
518.tealeaf_t	OMP	16	8	186	8.89	<u>186</u>	<u>8.87</u>	187	8.85	OMP	16	8	186	8.89	<u>186</u>	<u>8.87</u>	187	8.85
519.clvleaf_t	OMP	16	8	192	8.60	192	8.59	<u>192</u>	<u>8.59</u>	OMP	16	8	192	8.60	<u>192</u>	<u>8.59</u>	<u>192</u>	<u>8.59</u>
521.miniswp_t	OMP	16	8	<u>173</u>	<u>9.22</u>	172	9.30	174	9.21	OMP	16	8	<u>173</u>	<u>9.22</u>	172	9.30	174	9.21
528.pot3d_t	OMP	16	8	263	8.08	263	8.08	<u>263</u>	<u>8.08</u>	OMP	16	8	263	8.08	263	8.08	<u>263</u>	<u>8.08</u>
532.sph_exa_t	OMP	16	8	161	12.1	161	12.1	<u>161</u>	<u>12.1</u>	OMP	16	8	161	12.1	161	12.1	<u>161</u>	<u>12.1</u>
534.hpgmgfv_t	OMP	16	8	173	6.81	<u>172</u>	<u>6.82</u>	171	6.86	OMP	16	8	173	6.81	<u>172</u>	<u>6.82</u>	171	6.86
535.weather_t	OMP	16	8	40.3	79.9	<u>38.1</u>	<u>84.6</u>	37.3	86.6	OMP	16	8	40.3	79.9	<u>38.1</u>	<u>84.6</u>	37.3	86.6

SPEChpc 2021_tny_base = 12.9

SPEChpc 2021_tny_peak = 12.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEChpc™ 2021 Tiny Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_tny_base = 12.9

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9355)

SPEChpc 2021_tny_peak = 12.9

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2024
Hardware Availability: Oct-2024
Software Availability: Apr-2024

Hardware Summary

Type of System: Homogenous
Compute Node: Hyper A+ Server AS -2126HS-TN
Compute Nodes Used: 1
Total Chips: 2
Total Cores: 64
Total Threads: 128
Total Memory: 1536 GB
Max. Peak Threads: 8

Software Summary

Compiler: Intel oneAPI DPC++/C++ Compiler 2024.2.1
MPI Library: OpenMPI Version 5.0.5
Other MPI Info: None
Other Software: None
Base Parallel Model: OMP
Base Ranks Run: 16
Base Threads Run: 8
Peak Parallel Models: OMP
Minimum Peak Ranks: 16
Maximum Peak Ranks: 16
Max. Peak Threads: 8
Min. Peak Threads: 8

Node Description: Hyper A+ Server AS -2126HS-TN

Hardware

Number of nodes: 1
Uses of the node: compute
Vendor: Supermicro
Model: Hyper A+ Server AS -2126HS-TN
CPU Name: AMD EPYC 9355
CPU(s) orderable: 1,2 chips
Chips enabled: 2
Cores enabled: 64
Cores per chip: 32
Threads per core: 2
CPU Characteristics: Max. Boost Clock upto 4.4GHz
CPU MHz: 3550
Primary Cache: 32 KB I + 48 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core
L3 Cache: 256 MB I+D on chip per chip,
32 MB shared / 4 cores
Other Cache: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R,
running at 6000)
Disk Subsystem: 1 x 3.5 TB NVMe SSD
Other Hardware: None
Accel Count: None
Accel Model: None
Accel Vendor: None
Accel Type: None
Accel Connection: None
Accel ECC enabled: None
Accel Description: None
Adapter: None
Number of Adapters: 0
Slot Type: None
Data Rate: None

Software

Accelerator Driver: --
Adapter: None
Adapter Driver: None
Adapter Firmware: None
Operating System: Ubuntu 24.04 LTS
Kernel 6.8.0-44-generic
Local File System: ext4
Shared File System: None
System State: Multi-user, run level 3
Other Software: None

(Continued on next page)



SPEChpc™ 2021 Tiny Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_tny_base = 12.9

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9355)

SPEChpc 2021_tny_peak = 12.9

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2024
Hardware Availability: Oct-2024
Software Availability: Apr-2024

Node Description: Hyper A+ Server AS -2126HS-TN

Hardware (Continued)

Ports Used: 0
Interconnect Type: None

Submit Notes

The config file option 'submit' was used.

```
mpirun -np $ranks --bind-to core:overload-allowed --map-by ppr:1:numa:pe=16 --mca topo basic $command
```

General Notes

MPI startup command:
mpirun command was used to start MPI jobs.

Compiler Version Notes

=====
CXXC 532.sph_exa_t(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler 2024.2.1 (2024.2.1.20240711)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir:

/home/amd/spack/opt/spack/linux-ubuntu24.04-zen4/gcc-13.2.0/intel-oneapi-compilers-2024.2.1-njykuawredfxjir45iz3erssyetxux3c/compiler/2024.2/bin/compiler

Configuration file:

/home/amd/spack/opt/spack/linux-ubuntu24.04-zen4/gcc-13.2.0/intel-oneapi-compilers-2024.2.1-njykuawredfxjir45iz3erssyetxux3c/compiler/2024.2/bin/compiler/./icpx.cfg

=====
CC 505.lbm_t(base, peak) 513.soma_t(base, peak) 518.tealeaf_t(base, peak)
521.miniswp_t(base, peak) 534.hpgmgfv_t(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler 2024.2.1 (2024.2.1.20240711)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir:

/home/amd/spack/opt/spack/linux-ubuntu24.04-zen4/gcc-13.2.0/intel-oneapi-compilers-2024.2.1-njykuawredfxjir45iz3erssyetxux3c/compiler/2024.2/bin/compiler

Configuration file:

/home/amd/spack/opt/spack/linux-ubuntu24.04-zen4/gcc-13.2.0/intel-oneapi-compilers-2024.2.1-njykuawredfxjir45iz3erssyetxux3c/compiler/2024.2/bin/compiler/./icx.cfg

=====
FC 519.clvleaf_t(base, peak) 528.pot3d_t(base, peak) 535.weather_t(base,
peak)

(Continued on next page)



SPEChpc™ 2021 Tiny Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_tny_base = 12.9

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9355)

SPEChpc 2021_tny_peak = 12.9

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2024
Hardware Availability: Oct-2024
Software Availability: Apr-2024

Compiler Version Notes (Continued)

ifx (IFX) 2024.2.1 20240711
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
mpicc

C++ benchmarks:
mpicxx

Fortran benchmarks:
mpifort

Base Portability Flags

505.lbm_t: -DSPEC_LP64
513.soma_t: -DSPEC_NO_VAR_ARRAY_REDUCE -DSPEC_LP64
518.tealeaf_t: -DSPEC_LP64
521.miniswp_t: -DSPEC_LP64
532.sph_exa_t: -DSPEC_LP64
534.hpgmgfv_t: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Ofast -ipo -mprefer-vector-width=512 -march=skylake-avx512
-mtune=skylake-avx512 -qopenmp -ansi-alias

C++ benchmarks:
-Ofast -ipo -mprefer-vector-width=512 -march=skylake-avx512
-mtune=skylake-avx512 -qopenmp -ansi-alias

Fortran benchmarks:
-Ofast -ipo -mprefer-vector-width=512 -march=skylake-avx512
-mtune=skylake-avx512 -qopenmp -ansi-alias -nostandard-realloc-lhs
-align array64byte



SPEChpc™ 2021 Tiny Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_tny_base = 12.9

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9355)

SPEChpc 2021_tny_peak = 12.9

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2024
Hardware Availability: Oct-2024
Software Availability: Apr-2024

Base Other Flags

C benchmarks:

-limf

C++ benchmarks:

-limf

Fortran benchmarks:

-limf

Peak Compiler Invocation

C benchmarks:

mpicc

C++ benchmarks:

mpicxx

Fortran benchmarks:

mpifort

Peak Portability Flags

505.lbm_t: -DSPEC_LP64
513.soma_t: -DSPEC_NO_VAR_ARRAY_REDUCE -DSPEC_LP64
518.tealeaf_t: -DSPEC_LP64
521.miniswp_t: -DSPEC_LP64
532.sph_exa_t: -DSPEC_LP64
534.hpgmgfv_t: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

505.lbm_t: basepeak = yes

513.soma_t: basepeak = yes

518.tealeaf_t: basepeak = yes

(Continued on next page)



SPEChpc™ 2021 Tiny Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_tny_base = 12.9

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9355)

SPEChpc 2021_tny_peak = 12.9

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2024
Hardware Availability: Oct-2024
Software Availability: Apr-2024

Peak Optimization Flags (Continued)

521.miniswp_t: basepeak = yes

534.hpgmgfv_t: basepeak = yes

C++ benchmarks:

532.sph_exa_t: basepeak = yes

Fortran benchmarks:

519.clvleaf_t: basepeak = yes

528.pot3d_t: basepeak = yes

535.weather_t: basepeak = yes

Peak Other Flags

C benchmarks:

-limf

C++ benchmarks:

-limf

Fortran benchmarks:

-limf

The flags file that was used to format this result can be browsed at

http://www.spec.org/hpc2021/flags/Intel_compiler_flags_hpc.2024.2024-10-10.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/hpc2021/flags/Intel_compiler_flags_hpc.2024.2024-10-10.xml

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.1.7 on 2024-09-16 04:30:34-0400.
Report generated on 2024-10-10 12:31:46 by hpc2021 PDF formatter v1.0.3.
Originally published on 2024-10-10.