



SPEChpc™ 2021 Tiny Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_tny_base = 18.3

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9755)

SPEChpc 2021_tny_peak = 18.3

hpc2021 License: 6569


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Apr-2024

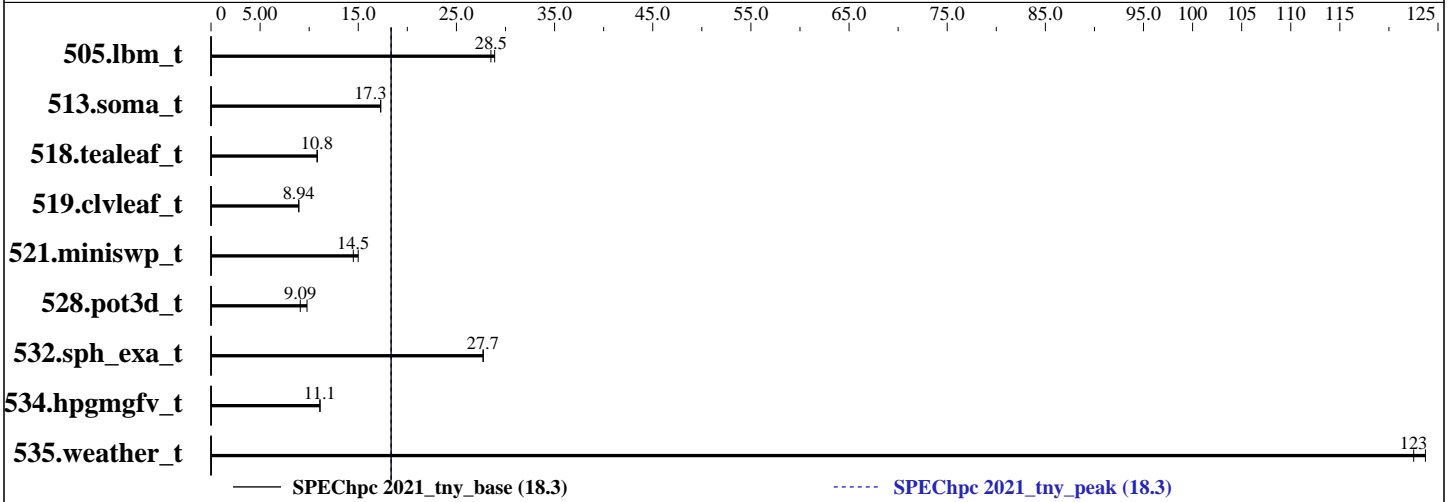

Results Table

Benchmark	Base										Peak							
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	MPI	256	1	78.9	28.5	77.9	28.9			MPI	256	1	78.9	28.5	77.9	28.9		
513.soma_t	MPI	256	1	214	17.3	214	17.3			MPI	256	1	214	17.3	214	17.3		
518.tealeaf_t	MPI	256	1	152	10.8	153	10.8			MPI	256	1	152	10.8	153	10.8		
519.clvleaf_t	MPI	256	1	185	8.94	184	8.95			MPI	256	1	185	8.94	184	8.95		
521.miniswp_t	MPI	256	1	110	14.5	107	15.0			MPI	256	1	110	14.5	107	15.0		
528.pot3d_t	MPI	256	1	217	9.78	234	9.09			MPI	256	1	217	9.78	234	9.09		
532.sph_exa_t	MPI	256	1	70.4	27.7	70.3	27.7			MPI	256	1	70.4	27.7	70.3	27.7		
534.hpgmgfv_t	MPI	256	1	106	11.1	106	11.1			MPI	256	1	106	11.1	106	11.1		
535.weather_t	MPI	256	1	26.1	124	26.3	123			MPI	256	1	26.1	124	26.3	123		

SPEChpc 2021_tny_base = 18.3

SPEChpc 2021_tny_peak = 18.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEChpc™ 2021 Tiny Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_tny_base = 18.3

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9755)

SPEChpc 2021_tny_peak = 18.3

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2024
Hardware Availability: Oct-2024
Software Availability: Apr-2024

Hardware Summary

Type of System: Homogenous
Compute Node: Hyper A+ Server AS -2126HS-TN
Compute Nodes Used: 1
Total Chips: 2
Total Cores: 256
Total Threads: 256
Total Memory: 1536 GB
Max. Peak Threads: 1

Software Summary

Compiler: Intel oneAPI DPC++/C++ Compiler 2024.2.1
MPI Library: Intel MPI Version 2021.13
Other MPI Info: None
Other Software: None
Base Parallel Model: MPI
Base Ranks Run: 256
Base Threads Run: 1
Peak Parallel Models: MPI
Minimum Peak Ranks: 256
Maximum Peak Ranks: 256
Max. Peak Threads: 1
Min. Peak Threads: 1

Node Description: Hyper A+ Server AS -2126HS-TN

Hardware

Number of nodes: 1
Uses of the node: compute
Vendor: Supermicro
Model: Hyper A+ Server AS -2126HS-TN
CPU Name: AMD EPYC 9755
CPU(s) orderable: 1,2 chips
Chips enabled: 2
Cores enabled: 256
Cores per chip: 128
Threads per core: 1
CPU Characteristics: Max. Boost Clock upto 4.1GHz
CPU MHz: 2700
Primary Cache: 32 KB I + 48 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core
L3 Cache: 512 MB I+D on chip per chip,
32 MB shared / 8 cores
Other Cache: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R,
running at 6000)
Disk Subsystem: 1 x 3.5 TB NVMe SSD
Other Hardware: None
Accel Count: None
Accel Model: None
Accel Vendor: None
Accel Type: None
Accel Connection: None
Accel ECC enabled: None
Accel Description: None
Adapter: None
Number of Adapters: 0
Slot Type: None
Data Rate: None

Software

Accelerator Driver: --
Adapter: None
Adapter Driver: None
Adapter Firmware: None
Operating System: Ubuntu 24.04 LTS
Kernel 6.8.0-44-generic
Local File System: ext4
Shared File System: None
System State: Multi-user, run level 3
Other Software: None

(Continued on next page)



SPEChpc™ 2021 Tiny Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_tny_base = 18.3

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9755)

SPEChpc 2021_tny_peak = 18.3

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2024
Hardware Availability: Oct-2024
Software Availability: Apr-2024

Node Description: Hyper A+ Server AS -2126HS-TN

Hardware (Continued)

Ports Used: 0
Interconnect Type: None

Submit Notes

The config file option 'submit' was used.

```
mpiexec.hydra -bootstrap ssh -genv OMP_NUM_THREADS $threads -np $ranks -ppn $ranks $command
```

General Notes

MPI startup command:
mpiexec.hydra command was used to start MPI jobs.

Compiler Version Notes

```
=====  
CXXC 532.sph_exa_t(base, peak)  
-----
```

Intel(R) oneAPI DPC++/C++ Compiler 2024.2.1 (2024.2.1.20240711)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir:

/home/amd/spack/opt/spack/linux-ubuntu24.04-zen4/gcc-13.2.0/intel-oneapi-compilers-2024.2.1-njykuawredfxjir45iz3erssyetxux3c/compiler/2024.2/bin/compiler

Configuration file:

/home/amd/spack/opt/spack/linux-ubuntu24.04-zen4/gcc-13.2.0/intel-oneapi-compilers-2024.2.1-njykuawredfxjir45iz3erssyetxux3c/compiler/2024.2/bin/compiler/./icpx.cfg

```
=====  
CC 505.lbm_t(base, peak) 513.soma_t(base, peak) 518.tealeaf_t(base, peak)  
521.miniswp_t(base, peak) 534.hpgmgfv_t(base, peak)  
-----
```

Intel(R) oneAPI DPC++/C++ Compiler 2024.2.1 (2024.2.1.20240711)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir:

/home/amd/spack/opt/spack/linux-ubuntu24.04-zen4/gcc-13.2.0/intel-oneapi-compilers-2024.2.1-njykuawredfxjir45iz3erssyetxux3c/compiler/2024.2/bin/compiler

Configuration file:

/home/amd/spack/opt/spack/linux-ubuntu24.04-zen4/gcc-13.2.0/intel-oneapi-compilers-2024.2.1-njykuawredfxjir45iz3erssyetxux3c/compiler/2024.2/bin/compiler/./icx.cfg

```
=====  
FC 519.clvleaf_t(base, peak) 528.pot3d_t(base, peak) 535.weather_t(base,  
peak)  
-----
```

(Continued on next page)



SPEChpc™ 2021 Tiny Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_tny_base = 18.3

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9755)

SPEChpc 2021_tny_peak = 18.3

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2024
Hardware Availability: Oct-2024
Software Availability: Apr-2024

Compiler Version Notes (Continued)

ifx (IFX) 2024.2.1 20240711
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

mpiicc -cc=icx

C++ benchmarks:

mpicpc -cxx=icpx

Fortran benchmarks:

mpiifort -fc=ifx

Base Portability Flags

505.lbm_t: -DSPEC_LP64
513.soma_t: -DSPEC_NO_VAR_ARRAY_REDUCE -DSPEC_LP64
518.tealeaf_t: -DSPEC_LP64
521.miniswp_t: -DSPEC_LP64
532.sph_exa_t: -DSPEC_LP64
534.hpgmgfv_t: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Ofast -ipo -mprefer-vector-width=512 -march=skylake-avx512
-mtune=skylake-avx512 -ansi-alias

C++ benchmarks:

-Ofast -ipo -mprefer-vector-width=512 -march=skylake-avx512
-mtune=skylake-avx512 -ansi-alias

Fortran benchmarks:

-Ofast -ipo -mprefer-vector-width=512 -march=skylake-avx512
-mtune=skylake-avx512 -ansi-alias -nostandard-realloc-lhs
-align array64byte



SPEChpc™ 2021 Tiny Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_tny_base = 18.3

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9755)

SPEChpc 2021_tny_peak = 18.3

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2024
Hardware Availability: Oct-2024
Software Availability: Apr-2024

Base Other Flags

C benchmarks:

-limf

C++ benchmarks:

-limf

Fortran benchmarks:

-limf

Peak Compiler Invocation

C benchmarks:

mpicc -cc=icx

C++ benchmarks:

mpicpc -cxx=icpx

Fortran benchmarks:

mpiifort -fc=ifx

Peak Portability Flags

505.lbm_t: -DSPEC_LP64
513.soma_t: -DSPEC_NO_VAR_ARRAY_REDUCE -DSPEC_LP64
518.tealeaf_t: -DSPEC_LP64
521.miniswp_t: -DSPEC_LP64
532.sph_exa_t: -DSPEC_LP64
534.hpgmgfv_t: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

505.lbm_t: basepeak = yes

513.soma_t: basepeak = yes

518.tealeaf_t: basepeak = yes

(Continued on next page)



SPEChpc™ 2021 Tiny Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_tny_base = 18.3

Hyper A+ Server AS -2126HS-TN (AMD EPYC 9755)

SPEChpc 2021_tny_peak = 18.3

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2024
Hardware Availability: Oct-2024
Software Availability: Apr-2024

Peak Optimization Flags (Continued)

521.miniswp_t: basepeak = yes

534.hpgmgfv_t: basepeak = yes

C++ benchmarks:

532.sph_exa_t: basepeak = yes

Fortran benchmarks:

519.clvleaf_t: basepeak = yes

528.pot3d_t: basepeak = yes

535.weather_t: basepeak = yes

Peak Other Flags

C benchmarks:

-limf

C++ benchmarks:

-limf

Fortran benchmarks:

-limf

The flags file that was used to format this result can be browsed at

http://www.spec.org/hpc2021/flags/Intel_compiler_flags_hpc.2024.2024-10-10.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/hpc2021/flags/Intel_compiler_flags_hpc.2024.2024-10-10.xml

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.1.7 on 2024-09-16 19:04:43-0400.
Report generated on 2024-10-10 12:31:48 by hpc2021 PDF formatter v1.0.3.
Originally published on 2024-10-10.