

V-Tour series



TD-6KW

Owner's Manual

Thank you, and congratulations on your choice of the Roland Drum System TD-6KW.

Before using this unit, carefully read the sections entitled: "USING THE UNIT SAFELY" and "IMPORTANT NOTES" (p. 2, p. 3). These sections provide important information concerning the proper operation of the unit. Additionally, in order to feel assured that you have gained a good grasp of every feature provided by your new unit, Owner's manual should be read in its entirety. The manual should be saved and kept on hand as a convenient reference.



* For the Snare (PDX-8) to function correctly, trigger parameters in the sound module TD-6V must be adjusted.

Copyright © 2006 ROLAND CORPORATION

All rights reserved. No part of this publication may be reproduced in any form without the written permission of ROLAND CORPORATION.

USING THE UNIT SAFELY

INSTRUCTIONS FOR THE PREVENTION OF FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS

About AWARNING and ACAUTION Notices

-	≜WARNING	Used for instructions intended to alert the user to the risk of death or severe injury should the unit be used improperly.
	⚠ CAUTION	Used for instructions intended to alert the user to the risk of injury or material damage should the unit be used improperly.
		* Material damage refers to damage or other adverse effects caused with respect to the home and all its furnishings, as well to domestic animals or pets.

About the Symbols

The \triangle symbol alerts the user to important instructions or warnings. The specific meaning of the symbol is determined by the design contained within the triangle. In the case of the symbol at left, it is used for general cautions, warnings, or alerts to danger.

The \(\sigma\) symbol alerts the user to items that must never be carried out (are forbidden). The specific thing that must not be done is indicated by the design contained within the circle. In the case of the symbol at left, it means that the unit must never be disassembled.

The symbol alerts the user to things that must be carried out. The specific thing that must be done is indicated by the design contained within the circle. In the case of the symbol at left, it means that the power-cord plug must be unplugged from the outlet.

ALWAYS OBSERVE THE FOLLOWING

MARNING

 Before using this unit, make sure to read the instructions below, and the Owner's Manual.



• Do not open or perform any internal modifications on the unit. (The only exception would be where this manual provides specific instructions which should be followed in order to put in place user-installable options; see p. 7.)

.....

 Do not attempt to repair the unit, or replace parts within it (except when this manual provides specific instructions directing you to do so). Refer all servicing to your retailer, the nearest Roland Service Center, or an authorized Roland distributor, as listed on the "Information" page.



Never use or store the unit in places that are:

.....

 Subject to temperature extremes (e.g., direct sunlight in an enclosed vehicle, near a heating duct, on top of heat-generating equipment); or are



- Damp (e.g., baths, washrooms, on wet floors); or are
- Humid; or are
- Exposed to rain; or are
- Dusty; or are
- Subject to high levels of vibration.
- This unit should be used only with a rack or stand that is recommended by Roland.



MARNING

When using the unit with a rack or stand recommended by Roland, the rack or stand must be carefully placed so it is level and sure to remain stable. If not using a rack or stand, you still need to make sure that any location you choose for placing the unit provides a level surface that will properly support the unit, and keep it from wobbling.



 Do not allow any objects (e.g., flammable material, coins, pins); or liquids of any kind (water, soft drinks, etc.) to penetrate the unit.

.....



 In households with small children, an adult should provide supervision until the child is capable of following all the rules essential for the safe operation of the unit.



Do not drop it!



A CAUTION

.....

 Try to prevent cords and cables from becoming entangled. Also, all cords and cables should be placed so they are out of the reach of children.



• Never climb on top of, nor place heavy objects on the unit.



 Should you remove nuts, washers, screws, anchor bolts, etc., keep them in a safe place out of children's reach, so there is no chance of them being swallowed accidentally.

.....



IMPORTANT NOTES

In addition to the items listed under "USING THE UNIT SAFELY" on page 2, please read and observe the following:

Placement

- Do not expose the unit to direct sunlight, place it near devices that radiate heat, leave it inside an enclosed vehicle, or otherwise subject it to temperature extremes.
 Excessive heat can deform or discolor the unit.
- Do not allow rubber, vinyl, or similar materials to remain on the unit for long periods of time. Such objects can discolor or otherwise harmfully affect the finish.

Maintenance

- For everyday cleaning wipe the unit with a soft, dry cloth
 or one that has been slightly dampened with water. To
 remove stubborn dirt, use a cloth impregnated with a
 mild, non-abrasive detergent. Afterwards, be sure to wipe
 the unit thoroughly with a soft, dry cloth.
- Never use benzine, thinners, alcohol or solvents of any kind, to avoid the possibility of discoloration and/or deformation.

Additional Precautions

- Use a reasonable amount of care when using the unit's buttons, sliders, or other controls; and when using its jacks and connectors. Rough handling can lead to malfunctions.
- When connecting / disconnecting all cables, grasp the connector itself—never pull on the cable. This way you will avoid causing shorts, or damage to the cable's internal elements.
- To avoid disturbing your neighbors, try to keep the unit's volume at reasonable levels. You may prefer to use headphones, so you do not need to be concerned about those around you (especially when it is late at night).
- This instrument is designed to minimize the extraneous sounds produced when it's played. However, since sound vibrations can be transmitted through floors and walls to a greater degree than expected, take care not to allow these sounds to become a nuisance to neighbors, especially when performing at night and when using headphones.
- The rubber portion of the striking surface is treated with a
 preservative to maintain its performance. With the
 passage of time, this preservative may appear on the
 surface as a white stain, or reveal how the pads were
 struck during product testing. This does not affect the
 performance or functionality of the product, and you may
 continue using it with confidence.

Checking the Contents of the Box

- ☐ TD-6V (Percussion Sound Module) x 1
- ☐ KD-8 (Kick Trigger Pad) x 1
- ☐ FD-8 (Hi-Hat Control Pedal) x 1
- □ PDX-8 (V-Pad) x 1
- □ PD-8 (Pad) x 3
- ☐ CY-5 (Cymbal Pad) x 1
- ☐ CY-8 (Cymbal Pad) x 2
- Connection Cables
- ☐ Tuning Key x 1
- TD-6KW Owner's Manual x 1

MEMO

- The tuning key is included in the FD-8 package.
- The TD-6V Owner's Manual is included in the TD-6V package.
- This package does not include a kick pedal. Use with a commercially available kick pedal.
- This package does not include the CY-5 attachment set for cymbal.
- * In the interest of product improvement, the specifications and/ or appearance of this unit are subject to change without prior notice.

Drum Stand

Assemble the Drum Stand.



About the Stand, refer to the owner's manual for the stand.


TD-6V (Percussion Sound Module)

Attach the mounting plate (included with the optional drum stand) to the TD-6V.


Using the screws attached to the bottom panel, attach the holder so the unit is oriented as shown in the diagram.




- To attach the stand holder, remove the four 8 mm screws (M5 x 8) from the bottom of the TD-6V and use them. Use of other screws may result in damage to the unit.
- When turning the unit upside-down, get a bunch
 of newspapers or magazines, and place them
 under the four corners or at both ends to prevent
 damage to the buttons and controls. Also, you
 should try to orient the unit so no buttons or
 controls get damaged.
- When turning the unit upside-down, handle with care to avoid dropping it, or allowing it to fall or tip over.




PDX-8 (Snare)



* Do NOT place your fingers inside the shell, as you may hurt yourself or cause damage to the PDX-8. Or when changing the head, do NOT touch any of the internal parts. Also, do not insert your fingers into the hole of the mounting bracket.









Adjusting the Head Tension

Before using the pad, tighten the head so that the tension is rather firm.


Looseness in the head tension may result in problems such as failure of the PDX-8's rim shots to sound or double triggering.



Striking the head when the head tension is loose may damage the sensor.


1. Use the tuning key to tighten the tuning bolts.

Strike the head to check the feel and response.





Tighten each tuning bolt one by one, observing the numerical order shown in the diagram. Do not firmly tighten a single tuning bolt by itself. Doing so will make it impossible to tension the head evenly, and will cause malfunctions.



2. Fine-tune the adjustment while continuing to check the pad feel and response.

MEMO


- On the PDX-8, adjusting the head tension affects only the head response, and does not change the pitch of the sound as it would on an acoustic drum.
- Head tension may slacken with the passage of time.
 Readjust the tension as needed.

Attaching the Pad to a Stand

Attach the PDX-8 to a pad mount of the stand.



Be sure to tighten the stand fixing screw securel. If it remain loose, double triggering may occur.



Playing Methods

Head Shots




* Do not strike the hoop.

Rim Shots




* To play rim shots, strike the rim in the area shown in the diagram.



Cross Stick

Only strike the rim of the pad.

Depending on the instrument assigned to the rim, you can play rim shots and/or cross stick sounds.



* To play the cross stick, be sure that you only strike the rim of the pad. Placing your hand on the head of the pad might prevent the cross stick sound from being played properly.

MEMO

For more on settings and tones, see the respective module's owner's manual.

HINT

If you hear a rim sound when you strike the head, decrease the "Rim Sens" value.

If you cannot get a rim sound even when you strike the rim hard, increase the "Rim Sens" value.

Head Replacement


When the Head Should Be Replaced

The head is an expendable item that eventually will wear out and need to be replaced. Replace the head when the following occurs:

Slack portions remain in the head even when the head tension is properly adjusted.

Replacement heads (optional): MH-8 Mesh Head

1. Remove all tuning bolts from the PDX-8.

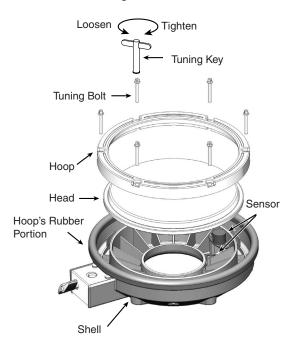



Do not apply excessive force to the sensor located under the head. Doing so can interfere with accurate detection, and may damage it.

- 2. Remove the hoop.
- 3. Remove the old head.
- 4. Place the new head on the shell.
- 5. Place the hoop onto the head.
- 6. Attach the tuning bolts to the hoop and shell.
- **7.** Next, adjust the tension of the head. Refer to "Adjusting the Head Tension" (p. 5).



Do not firmly tighten a single tuning bolt by itself. Doing so will make it impossible to tension the head evenly, and will cause malfunctions.

Specifications

PDX-8

Head Size: 8 inches
Triggers: 2 (Head, Rim)

Dimensions: 266 (W) x 326 (D) x 62 (H) mm

10-1/2 (W) x 12-7/8 (D) x 2-1/2 (H) inches


Weight: 1.3 kg

2 lbs 14 oz

Option: Mesh Head (MH-8)


- * The Rim rubber is one component that eventually wears out (the more so if numerous rim shots are performed), and will require replacement. Rim shots may not be performed correctly when the rim rubber is worn out. If this occurs, replace the rim rubber. Consult Roland Service for more on replacing the rim rubber.
- * Due to the nature of the materials used in the sensor, changes in room temperature may affect the sensitivity of the sensor.

PD-8 (Tom)



Attaching the Pad to a Stand

Attach the PDX-8 to a pad mount of the stand.




Pass the rod through the pipe that is inside the holder.



When attaching the PD-8s to the mounts, be sure to tighten the stand fixing screws securely. If any of them remain loose, the pad could fall off.

Playing the PD-8

Head Shot



Rim Shot



To play the sound assigned to the head, hit only the head. To play a rim shot, you must **strike both the head and the rim of the pad simultaneously**.

Specifications

PD-8

Pad Size: 8.5 inches
Triggers: 2 (Head, Rim)


Dimensions: 226 (W) x 280 (D) x 54 (H) mm

8-15/16 (W) x 11-1/16 (W) x 2-1/8 (H) inches

Weight: 1.2 kg


2 lbs 11 oz

CY-5 (Hi-Hat)




Making the Settings

When mounting the CY-5 on an L-Rod (pad mount), use ONLY the attachment set as shown below.




1. Mounting the lower clutch and the clutch felt (L).

Align the notched section as shown below. Then place the clutch felt (L) so it fits securely.




2. Mount the CY-5 so it fits the lower clutch as shown below.



3. Place the clutch felt (S), and while applying some pressure, mount the upper clutch as shown.

Afterwards, you can adjust the upper clutch to have the movement you desire. If it is too loose, double triggering may occur.

Be sure the ROLAND logo is on the opposite side of the playing area.



Specifications

CY-5

Size: 10 inches Triggers: 2 (Bow, Edge)

Dimensions: 246 (W) x 246 (D) x 45 (H) mm

9-11/16 (W) x 9-11/16 (D) x 1-13/16 (H)

inches

Weight: 380 g


14 oz (without attachment)


Accessories: Attachment Set for Hi-Hat (Upper Clutch,

Lower Clutch, Clutch Felt (L), Clutch Felt (S))

* Continuous playing may cause dis-coloration of the pad, but this will not affect the Pad's function.

CY-8 (Crash Cymbal/Ride Cymbal)






Attaching the Cymbal Pad to a Stand


1. Use a tuning key to tighten the stopper bolt.

The stopper keeps the cymbal pad from turning, and prevents the cables from catching or getting tangled on the stand.



- Attach the CY-8 so the Roland logo is positioned on the opposite side of the playing area.
- 3. Tighten the wing nut to obtain the desired movement.

Use the included felt washer and the wing nut.





Double sounding may occur if the wing nut is loose.

Playing the CY-8

Bow Shot


This is the most common playing method, playing the pad face of the cymbal. It corresponds to the sound of the "headside" of the connected trigger input.



Edge Shot

This playing method involves striking the edge with the shoulder of the stick. It corresponds to the sound of the "rimside" of the connected trigger input.

* To make use of edge shot, you'll need to connect to a trigger input jack on the percussion sound module that accommodates rim shots.



Choking

Choking (pinching) the cymbal's edge with the hand immediately after hitting the cymbal makes the sound stop.

* To make use of choking play techniques, you'll need to connect to a trigger input jack on the percussion sound module that accommodates rim shots.



Specifications

CY-8

Size: 12 inches Triggers: 2 (Bow, Edge)

Dimensions: 290 (W) x 295 (D) x 47 (H) mm


11-7/16 (W) x 11-5/8 (D) x 1-7/8 (H) inches

Weight: 650 g / 1 lb 7 oz

Accessories: Wing Nut, Felt Washer, Stopper

* Continuous playing may cause dis-coloration of the pad, but this will not affect the Pad's function.

FD-8 (Hi-Hat Control Pedal)

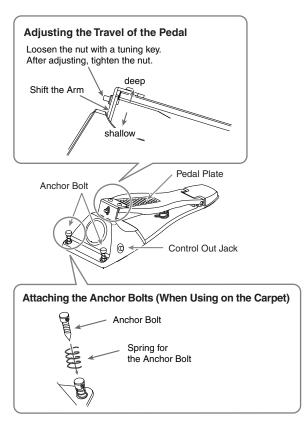



- The tips of the anchor bolts are sharp. Handle with care.
- When using on flooring, the anchor bolts may damage the floor. Do not attach the anchor bolts.
- When the FD-8 is not going to be used for a long period of time, move and fix the arm, allowing longer travel for the pedal.
- To avoid damage, do not leave the FD-8 for extended periods of time with the pedal plate depressed.

Using the FD-8

Using the FD-8, you can control the opening and closing of the hi-hat sound.

Open Hi-Hat

Strike the hi-hat without pressing the pedal

Half Open Hi-Hat

Strike the hi-hat with the pedal pressed half-way

Closed Hi-Hat

Strike the hi-hat with the pedal pressed

Foot Closed

Completely press down the pedal

Foot Open

Press the pedal and then immediately release it

HINT

The volume of the Foot Closed sound can be adjusted separately (TD-6V Owner's Manual; p. 66).



- Connect the FD-8 to the TD-6V before turning on the power.
- Do NOT press the pedal when turning on the power.

Specifications

FD-8

Dimensions: 130 (W) x 396 (D) x 103 (H) mm


5-1/8 (W) x 15-5/8 (D) x 4-1/16 (H) inches

Weight: 1.3 kg

2 lbs 14 oz


Accessory: Tuning Key

KD-8 (Kick)




Making the Settings


 Remove the screws attached to the reverse side of the KD-8's trigger.



2. Pull out the stand in the direction indicated by the arrow until it is fully extended.




3. Use a tuning key to tighten the screws removed in Step 1 so that the stand is firmly secured.




4. Attach the kick pedal.

Position the beater so that it strikes the center of the head, then secure the kick pedal and KD-8 firmly in place.




Adjusting the Foot Plate Height

Depending on your kick pedal, it can be unstable when you attach it to the KD-8. Be sure to adjust the foot plate height so that the entire bottom surface of the pedal is attached to the floor.




* Adjust the height so that the entire pedal comes into contact with the floor.

1. Loosen the stand's anchor bolts and remove the foot plate.



- 2. Set the kick pedal so that the entire bottom surface is attached to the floor.
- In most cases, the stand becomes somewhat floated. Tighten the anchor bolts securely there to fix the stand and foot plate.



NOTE

- Install the kick pedal securely.
- Take care not to pinch your fingers.
- The tips of the anchor bolts are sharp. Handle with care.
- When moving the setup, be sure to remove the screws and fold the stand. Transporting the KD-8 while it remains open may subject the stand to excessive strain and result in damage to the stand.

Adjusting the Anchor Bolts

When using the kick pedal on a carpet or similar surface, adjust the anchor bolts so their tips protrude from the plate and secure the pedal in place; this will make it easier to use the kick pedal.


However, when used on flooring, the anchor bolts may damage the floor. Adjust the anchor bolts correctly.

Adjusting the Anchor Bolts When Using on the Carpet When using on the Floor




The tips of the anchor bolts are sharp. Handle with care.

When Using a Twin Pedal



Position the two beaters equally apart from the center of the pad as shown in the figure at left. If one of the beater is further away from the center than the other, the sound from the further beater will be lower in volume, or will not sound as desired.



Using a twin pedal will result in lower sensitivity as compared to when a single pedal is used. Raise the sensitivity on the sound module.

Specifications

KD-8

Dimensions: 272 (W) x 260 (D) x 405 (H) mm

10-3/4 (W) x 10-1/4 (D) x 16 (H) inches

Weight: 2.9 kg

6 lbs 7 oz

Accessories: Screws

* Continuous playing may cause dis-coloration of the pad, but this will not affect the Pad's function.


Assemble the "TD-6KW"

Using the provided cables, connect the pads.


Connect the L-shaped plugs of the included cables to the pads.



To prevent malfunction and/or damage to speakers or other devices, always turn down the volume, and turn off the power on all devices before making any connections.

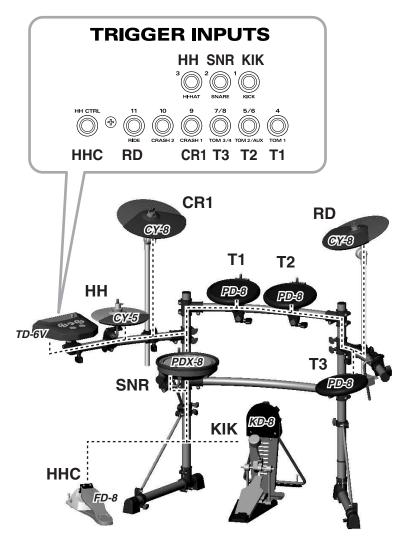

- Insert the plugs of connecting cables into the TRIGGER INPUTS jacks on the rear of the TD-6V.
- 2. Insert the L-sharped plugs into the TRIGGER OUTPUTS jacks of the pads.
 - * When you connect the cables, please refer to the marking label that is attached on both edge of the cables.



Trigger Settings for the TD-6V

For the Snare (PDX-8) to function correctly, trigger parameters in the sound module TD-6V must be adjusted.

For more detailed informations, refer to the TD-6KV Owner's Manual.

Adding the Optional Pads to the TD-6KW

When adding the new pad, use trigger input 10 (CRASH2).

With the optional cable (PCS-31L) or a standard insert cable, you can connect two pads to the triger inputs 5/6 (TOM2/AUX) and 7/8 (TOM3/4). You can use up to 11 pads at the same time.

* When connecting two pads to 1 input (5/6 or 7/8), rim shots are not be possible. For more information, refer to TD-6V Owner's Manual p.70.

Examples

Adding a Cymbal

Adding the CY-8 or the CY-5 for a 2nd Crash or a Splash Cymbal. For mounting, use the Cymbal Mount MDY-10U.

Adding a Tom

Adding the PD-8 for a 2nd floor tom.

Connect the PD-8 to the trigger input 10 (CRASH2).

With the optional cable (PCS-31L), you can also connect two PD-8s to the trigger input 7/8 (TOM3/4). For mounting, use the Pad Mount MDH-10U.

TD-6V Rear Panel TD-6V Rear Panel

Options

Kick Trigger Pad: KD-8, KD-7 V-Kick Trigger Pad: KD-85, KD-120

Dual Trigger Pad: PD-8

V-Pad: PDX-8, PD-85, PD-105, PD-125

Cymbal Pad: CY-8, CY-5

V-Cymbal: CY-12R/C, CY-14C, CY-15R

Pad Mount: MDH-10U Cymbal Mount: MDY-10U

Connection Cable: PCS-31L

Information

When you need repair service, call your nearest Roland Service Center or authorized Roland distributor in your country as shown below.

AFRICA

EGYPT

Al Fanny Trading Office 9, EBN Hagar Al Askalany Street, ARD E1 Golf, Heliopolis,

Cairo 11341 FGYPT TEL: 20-2-417-1828

REUNION

Maison FO - YAM Marcel 25 Rue Jules Hermann, Chaudron - BP79 97 491 Ste Clotilde Cedex REUNION ISLAND TEL: (0262) 218-429

SOUTH AFRICA T.O.M.S. Sound & Music

(Pty)Ltd. 2 ASTRON ROAD DENVER JOHANNESBURG ZA 2195, SOUTH AFRICA TEL: (011)417 3400

Paul Bothner(PTY)Ltd. Royal Cape Park, Unit 24 Londonderry Road, Ottery 7800 Cape Town, SOUTH AFRICA TEL: (021) 799 4900



Roland Shanghai Electronics

Co.,Ltd. 5F. No.1500 Pingliang Road Shanghai 200090, CHINA TEL: (021) 5580-0800

Roland Shanghai Electronics

Co.,Ltd. (BEIJING OFFICE) 10F. No.18 3 Section Anhuaxili Chaoyang District Beijing 100011 CHINA

TEL: (010) 6426-5050 HONG KONG

Service Division 22-32 Pun Shan Street, Tsuen Wan, New Territories, HONG KONG TEL: 2415 0911

Tom Lee Music Co., Ltd.

Parsons Music Ltd. 8th Floor, Railway Plaza, 39 Chatham Road South, T.S.T, Kowloon, HONG KONG TEL: 2333 1863

INDIA

Rivera Digitec (India) Pvt. Ltd. 411, Nirman Kendra Mahalaxmi Flats Compound Off. Dr. Edwin Moses Road, Mumbai-400011, INDIA TEL: (022) 2493 9051

INDONESIA

PT Citra IntiRama Jl. Cideng Timur No. 15J-15O Jakarta Pusat INDONESIA TEL: (021) 6324170

KOREA

Cosmos Corporation 1461-9, Seocho-Dong, Seocho Ku, Seoul, KOREA TEL: (02) 3486-8855

MALAYSIA

Roland Asia Pacific Sdn. Bhd. 45-1, Block C2, Jalan PJU 1/39, Dataran Prima, 47301 Petaling Jaya, Selangor, MALAYSIA TEL: (03) 7805-3263

VIFT NAM

Suoi Nhac Company, Ltd. 370 Cach Mang Thang Tam St. Dist.3, Ho Chi Minh City, VIET NAM TEL: 9316540

PHILIPPINES

G.A. Yupangco & Co. Inc. 339 Gil J. Puyat Avenue Makati, Metro Manila 1200, PHILIPPINES TEL: (02) 899 9801

SINGAPORE

SWEELEE MUSIC COMPANY PTF LTD 150 Sims Drive, SINGAPORE 387381 TEL: 6846-3676

TAIWAN

ROLAND TAIWAN ENTERPRISE CO., LTD. Room 5, 9fl. No. 112 Chung Shan N.Road Sec.2, Taipei TEL: (02) 2561 3339

THAILAND

Theera Music Co. , Ltd. 330 Soi Verng NakornKasem, New Road, Sumpantawongse, Bangkok 10100, THAILAND TEL: (02) 224-8821

AUSTRALIA/ **NEW ZEALAND**

AUSTRALIA/

NEW ZEALAND Roland Corporation Australia Ptv.,Ltd. 38 Campbell Avenue Dee Why West. NSW 2099 AUSTRÁLIA

Tel: (02) 9982 8266 For New Zealand Tel: (09) 3098 715

CENTRAL/LATIN **AMERICA**

ARGENTINA Instrumentos Musicales S.A.

Av.Santa Fe 2055 (1123) Buenos Aires ARGENTINA TEL: (011) 4508-2700

BARBADOS

A&B Music Supplies LTD 12 Webster Industrial Park Wildey, St.Michael, Barbados TEL: (246)430-1100

BRAZIL

Roland Brasil Ltda. Rua San Jose, 780 Sala B Parque Industrial San Jose Cotia - Sao Paulo - SP, BRAZIL TEL: (011) 4615 5666

CHILE

Comercial Fancy II S.A. Rut.: 96.919.420-1 Nataniel Cox #739, 4th Floor Santiago - Centro, CHILE TEL: (02) 688-9540

COLOMBIA

Centro Musical Ltda. Cra 43 B No 25 A 41 Bododega 9 Medellin, Colombia TEL: (574)3812529

COSTA RICA

JUAN Bansbach Instrumentos Musicales Ave.1. Calle 11, Apartado

10237, San Jose, COSTA RICA TEL: 258-0211

CURACAO

Zeelandia Music Center Inc. Orionweg 30 Curacao, Netherland Antilles TEL:(305)5926866

DOMINICAN REPUBLIC

Instrumentos Fernando Giraldez Calle Proyecto Central No.3 Ens.La Esperilla Santo Domingo, Dominican Republic TEL:(809) 683 0305

ECUADOR

Mas Musika Rumichaca 822 y Zaruma Guayaguil - Ecuador TEL:(593-4)2302364

EL SALVADOR

OMNI MUSIC 75 Avenida Norte y Final Alameda Juan Pablo II, Edificio No.4010 San Salvador, EL SALVADOR

TEL: 262-0788

GUATEMALA Casa Instrumental Calzada Roosevelt 34-01,zona 11 Ciudad de Guatemala Guatemala

TEL:(502) 599-2888 HONDURAS

Almacen Paiaro Azul S.A. de C.V. BO.Paz Barahona 3 Ave.11 Calle S.O San Pedro Sula, Honduras TEL: (504) 553-2029

MARTINIQUE Musique & Son Z.I.Les Mangle 97232 Le Lamantin Martinique F.W.I. TEL: 596 596 426860

Gigamusic SARI. 10 Rte De La Folie 97200 Fort De France Martinique F.W.I. TEL: 596 596 715222

MEXICO

Casa Veerkamp, s.a. de c.v. Av. Toluca No. 323, Col. Olivar de los Padres 01780 Mexico D.F. MEXICO TEL: (55) 5668-6699

NICARAGUA

Bansbach Instrumentos Musicales Nicaragua Altamira D'Este Calle Principal de la Farmacia 5ta. Avenida 1 Cuadra al Lago.#503 Managua, Nicaragua TEL: (505)277-2552

PANAMA

SUPRO MUNDIAL, S.A. Boulevard Andrews, Albrook, Panama City, REP. DE PANAMA TEL: 315-0101

PARAGUAY

Distribuidora De Instrumentos Musicales J.E. Olear y ESQ. Manduvira Asuncion PARAGUAY TEL: (595) 21 492147

PERU

Audionet Distribuciones Musicales SAC Juan Fanning 530 Miraflores Lima - Peru TEL: (511) 4461388

TRINIDAD

AMR Ltd Ground Floor Maritime Plaza Barataria Trinidad W.I. TEL: (868) 638 6385

URUGUAY

Todo Musica S.A. Francisco Acuna de Figueroa C P · 11 800 Montevideo, URUGUAY TEL: (02) 924-2335

VENEZUELA

Allegro,C.A. Av.las industrias edf.Guitar import #7 zona Industrial de Turumo Caracas, Venezuela TEL: (212) 244-1122

Instrumentos Musicales

EUROPE

AUSTRIA

Roland Elektronische Musikinstrumente HmbH. Austrian Office Eduard-Bodem-Gasse 8, A-6020 Innsbruck, AUSTRIA

TEL: (0512) 26 44 260 BELGIUM/FRANCE/ HOLLAND/

LUXEMBOURG Roland Central Europe N.V. Houtstraat 3, B-2260, Oevel (Westerlo) BELGIUM

TEL: (014) 575811

CROATIA ART-CENTAR Degenova 3. HR - 10000 Zagreb TEL: (1) 466 8493

CZECH REP.

CZECH REPUBLIC DISTRIBUTOR s.r.o. Voctárova 247/16 CZ - 180 00 PRAHA 8, CZECH REP TEL: (2) 830 20270

DENMARK

Roland Scandinavia A/S Nordhavnsvej 7, Postbox 880, DK-2100 Copenhagen DENMARK TEL: 3916 6200

FINLAND

Roland Scandinavia As, Filial Finland Elannontie 5 FIN-01510 Vantaa, FINLAND TEL: (0)9 68 24 020

GERMANY

Roland Elektronische Musikinstrumente HmbH. Oststrasse 96, 22844 Norderstedt GERMANY TEL: (040) 52 60090

GREECE/CYPRUS

STOLLAS S.A. Music Sound Light 155, New National Road Patras 26442, GREECE

TEL: 2610 435400 **HUNGARY**

Roland East Europe Ltd. Warehouse Area 'DEPO' Pf.83 H-2046 Torokbalint, HUNGARY TEL: (23) 511011

IRELAND

Roland Ireland G2 Calmount Park, Calmount Avenue, Dublin 12 Republic of IRELAND TEL: (01) 4294444

ΙΤΔΙΥ

Roland Italy S. p. A. Viale delle Industrie 8, 20020 Arese, Milano, ITALY TEL: (02) 937-78300

NORWAY

Roland Scandinavia Avd. Kontor Norge Lilleakerveien 2 Postboks 95 Lilleaker N-0216 Oslo NORWAY TEL: 2273 0074

POLAND

ROLAND POLSKA SP. Z O.O. UL. Gibraltarska 4 PL-03 664 Warszawa POLAND TFL: (022) 679 4419

PORTUGAL

Roland Iberia, S.L. Portugal Office Cais das Pedras, 8/9-1 Dto 4050-465, Porto, PORTUGAL TEL: 22 608 00 60

ROMANIA

FBS LINES Piata Libertatii 1, 535500 Gheorgheni, ROMANIA

TEL: (266) 364 609

RUSSIA MuTek Dorozhnaya ul.3,korp.6 117 545 Moscow, RUSSIA

TEL: (095) 981-4967

SLOVAKIA DAN Acoustic s.r.o. Povazská 18. SK - 940 01 Nové Zámky

TEL: (035) 6424 330

SPAIN Roland Iberia, S.L. Paseo García Faria, 33-35 08005 Barcelona SPAIN TEL: 93 493 91 00

SWEDEN

Roland Scandinavia A/S SWEDISH SALES OFFICE Danvik Center 28, 2 tr. S-131 30 Nacka SWEDEN TEL: (0)8 702 00 20

SWITZERLAND

Roland (Switzerland) AG Landstrasse 5, Postfach, CH-4452 Itingen. SWITZERI AND TEL: (061) 927-8383

UKRAINE

EURHYTHMICS Ltd. P.O.Box: 37-a. Nedecey Str. 30 UA - 89600 Mukachevo, UKRAINE TEL: (03131) 414-40

UNITED KINGDOM

Roland (U.K.) Ltd. Atlantic Close, Swansea Enterprise Park, SWANSEA SA7 9FL UNITED KINGDOM

MIDDLE EAST

BAHRAIN

Moon Stores No.1231&1249 Rumaytha Building Road 3931, Manama 339 BAHRAIN TFL: 17 813 942

IRΔN

MOCO INC. No.41 Nike St., Dr.Shariyati Ave., Roberoye Cerahe Mirdamad Tehran, IRAN TEL: (021) 285-4169

ISRAEL

Halilit P. Greenspoon & Sons 8 Retzif Ha'alia Hashnia St. Tel-Aviv-Yafo ISRAEL TEL: (03) 6823666

IORDAN

MUSIC HOUSE CO. LTD. FREDDY FOR MUSIC P. O. Box 922846 Amman 11192 JORDAN TEL: (06) 5692696

KUWAIT

EASA HUSAIN AL-YOUSIFI & SONS CO. Abdullah Salem Street, Safat, KUWAIT TEL: 243-6399

LEBANON

Chahine S.A.L. George Zeidan St., Chahine Bldg., Achrafieh, P.O.Box: 16-5857 Beirut, LEBANON TEL: (01) 20-1441

OMAN

TALENTZ CENTRE L.L.C. Malatan House No.1 Al Noor Street, Ruwi SULTANATE OF OMAN TEL: 2478 3443

QATAR Al Emadi Co. (Badie Studio & Stores) P.O. Box 62, Doha, QATAR TEL: 4423-554

SAUDI ARABIA

aDawliah Universal Electronics APL Corniche Road, Aldossary Bldg., 1st Floor, Alkhobar, 31952 SAUDI ARABIA

P.O.Box 2154, Alkhobar 31952 SAUDI ARABIA TEL: (03) 898 2081

SYRIA

Technical Light & Sound Center Rawda, Abdul Qader Jazairi St. Bldg. No. 21, P.O.BOX 13520, Damascus, SYRIA TEL: (011) 223-5384

TURKEY

ZUHAL DIS TICARET A.S. Galip Dede Cad. No.37 Beyoglu - Istanbul / TURKEY TEL: (0212) 249 85 10

U.A.E.

Zak Electronics & Musical Instruments Co. L.L.C. Zabeel Road, Al Sherooq Bldg., No. 14, Ground Floor, Dubai, HAF TEL: (04) 3360715

NORTH AMERICA

CANADA

Roland Canada Ltd. (Head Office) 5480 Parkwood Way Richmond B. C., V6V 2M4 CANADA TEL: (604) 270 6626

Roland Canada Ltd.

(Toronto Office) 170 Admiral Boulevard Mississauga On L5T 2N6 CANADA TEL: (905) 362 9707

Roland Corporation U.S. 5100 S. Eastern Avenue Los Angeles, CA 90040-2938, TEL: (323) 890 3700

As of May 1, 2007 (ROLAND)

