



# SPEChpc™ 2021 Small Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

## xFusion


SPEChpc 2021\_sml\_base = 1.66

FusionServer 2288H V6 (Intel Xeon Platinum 8380)

SPEChpc 2021\_sml\_peak = 1.75

hpc2021 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Jul-2022  
Hardware Availability: Apr-2021  
Software Availability: Oct-2021

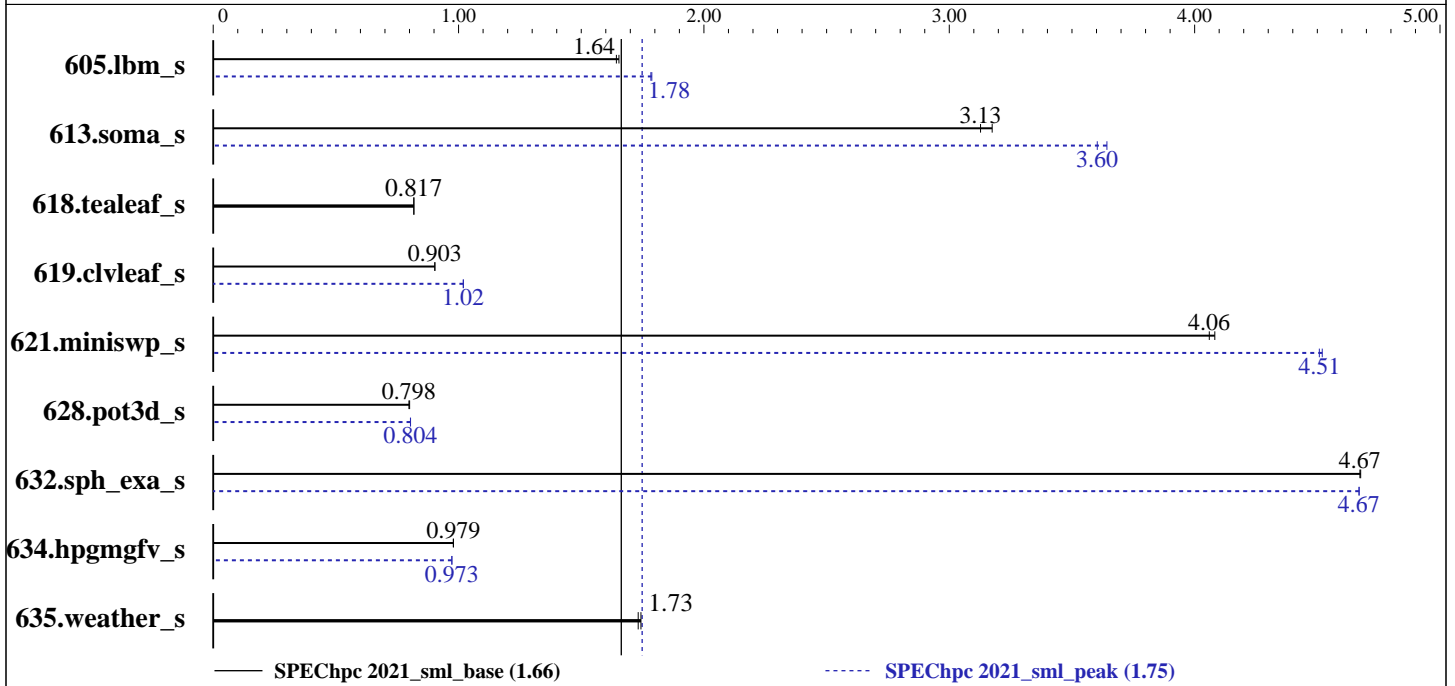

## Results Table

Benchmark	Base								Peak									
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
605.lbm_s	OMP	48	10	<b>943</b>	<b>1.64</b>	937	1.65			OMP	24	20	867	1.79	<b>869</b>	<b>1.78</b>		
613.soma_s	OMP	48	10	504	3.17	<b>512</b>	<b>3.13</b>			OMP	6	80	<b>444</b>	<b>3.60</b>	439	3.64		
618.tealeaf_s	OMP	48	10	2505	0.818	<b>2508</b>	<b>0.817</b>			OMP	48	10	2505	0.818	<b>2508</b>	<b>0.817</b>		
619.cvlleaf_s	OMP	48	10	1826	0.903	<b>1827</b>	<b>0.903</b>			OMP	24	20	1618	1.02	<b>1619</b>	<b>1.02</b>		
621.miniswp_s	OMP	48	10	269	4.08	<b>271</b>	<b>4.06</b>			OMP	24	20	243	4.52	<b>244</b>	<b>4.51</b>		
628.pot3d_s	OMP	48	10	2092	0.801	<b>2100</b>	<b>0.798</b>			OMP	6	80	<b>2084</b>	<b>0.804</b>	2083	0.804		
632.sph_exa_s	OMP	48	10	<b>492</b>	<b>4.67</b>	492	4.68			OMP	48	10	<b>493</b>	<b>4.67</b>	492	4.67		
634.hpgmgfv_s	OMP	48	10	996	0.979	<b>996</b>	<b>0.979</b>			OMP	48	10	<b>1002</b>	<b>0.973</b>	1002	0.973		
635.weather_s	OMP	48	10	1491	1.74	<b>1501</b>	<b>1.73</b>			OMP	48	10	1491	1.74	<b>1501</b>	<b>1.73</b>		

SPEChpc 2021\_sml\_base = 1.66

SPEChpc 2021\_sml\_peak = 1.75

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEChpc™ 2021 Small Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

## xFusion

SPEChpc 2021\_sml\_base = 1.66

FusionServer 2288H V6 (Intel Xeon Platinum 8380)

SPEChpc 2021\_sml\_peak = 1.75

**hpc2021 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** Oct-2021

### Hardware Summary

Type of System: Homogeneous Cluster  
Compute Node: Fusionserver 2288H V6  
Interconnect: Mellanox HDR  
Compute Nodes Used: 3  
Total Chips: 6  
Total Cores: 240  
Total Threads: 480  
Total Memory: 768 GB  
Max. Peak Threads: 80

### Software Summary

Compiler: Intel oneAPI Compiler 2021.4.0  
MPI Library: Intel MPI Library for Linux\* OS, Version 2021.4.0 Build 20210831  
Other MPI Info: --  
Other Software: --  
Base Parallel Model: OMP  
Base Ranks Run: 48  
Base Threads Run: 10  
Peak Parallel Models: OMP  
Minimum Peak Ranks: 6  
Maximum Peak Ranks: 48  
Max. Peak Threads: 80  
Min. Peak Threads: 10

## Node Description: Fusionserver 2288H V6

### Hardware

Number of nodes: 3  
Uses of the node: Compute  
Vendor: xFusion  
Model: FusionServer 2288H V6  
CPU Name: Intel Xeon Platinum 8380  
CPU(s) orderable: 1, 2 chips  
Chips enabled: 2  
Cores enabled: 80  
Cores per chip: 40  
Threads per core: 2  
CPU Characteristics: Turbo Boost Technology up to 3.4 GHz  
CPU MHz: 2300  
Primary Cache: 32 KB I + 48 KB D on chip per core  
Secondary Cache: 1.25 MB I+D on chip per core  
L3 Cache: 60 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx8 PC4-3200R)  
Disk Subsystem: 2 x 480 GB SATA 2.5" SSD (RAID 1)  
Other Hardware: None  
Accel Count: None  
Accel Model: --  
Accel Vendor: None  
Accel Type: None  
Accel Connection: None  
Accel ECC enabled: None  
Accel Description: None  
Adapter: MCX653105A-EFAT  
Number of Adapters: 1  
Slot Type: PCI-Express 4.0 x16  
Data Rate: 100 Gb/s  
Ports Used: 1

### Software

Accelerator Driver: --  
Adapter: MCX653105A-EFAT  
Adapter Driver: 5.4-3.1.0  
Adapter Firmware: 20.32.1010  
Operating System: CentOS Linux release 8.2.2004  
4.18.0-193.el8.x86\_644  
Local File System: xfs  
Shared File System: NFS  
System State: Multi-user, run level 3  
Other Software: None

(Continued on next page)



# SPEChpc™ 2021 Small Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

## xFusion

SPEChpc 2021\_sml\_base = 1.66

FusionServer 2288H V6 (Intel Xeon Platinum 8380)

SPEChpc 2021\_sml\_peak = 1.75

**hpc2021 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** Oct-2021

### Node Description: Fusionserver 2288H V6

#### Hardware (Continued)

Interconnect Type: Mellanox HDR

### Interconnect Description: Mellanox HDR

#### Hardware

Vendor: Mellanox  
Model: Mellanox HDR  
Switch Model: Mellanox MQM8790-HS2F  
InfiniBand Switch  
Number of Switches: 1  
Number of Ports: 40  
Data Rate: 200 Gbit/s  
Firmware: --  
Topology: Mesh  
Primary Use: MPI Traffic

#### Software

: --

### Submit Notes

The config file option 'submit' was used.  
export LD\_PRELOAD="/usr/lib64/libhugetlbfs.so \$LD\_PRELOAD"  
export OMP\_PROC\_BIND=true  
mpirun.hydra -bootstrap ssh -hostfile \${top}/3node --bind-to core -np \$ranks -ppn \$ppn -genv OMP\_NUM\_THREADS=\$threads \$command

### Compiler Version Notes

=====  
CC 605.lbm\_s(base, peak) 613.soma\_s(base, peak) 618.tealeaf\_s(base, peak)  
621.miniswp\_s(base, peak) 634.hpgmgfv\_s(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler 2021.4.0 (2021.4.0.20210924)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /home/opt/compiler/oneapi/2021.4.0/compiler/2021.4.0/linux/bin  
-----

=====  
CXXC 632.sph\_exa\_s(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler 2021.4.0 (2021.4.0.20210924)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /home/opt/compiler/oneapi/2021.4.0/compiler/2021.4.0/linux/bin

(Continued on next page)



# SPEChpc™ 2021 Small Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

## xFusion

SPEChpc 2021\_sml\_base = 1.66

FusionServer 2288H V6 (Intel Xeon Platinum 8380)

SPEChpc 2021\_sml\_peak = 1.75

**hpc2021 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** Oct-2021

## Compiler Version Notes (Continued)

=====  
FC 619.clvleaf\_s(base, peak) 628.pot3d\_s(base, peak) 635.weather\_s(base, peak)  
=====

-----  
ifx (IFORT) 2021.4.0 Beta 20210924  
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

mpiicc -cc=icx -lstdc++(\*)

C++ benchmarks:

mpiicpc -cxx=icx -lstdc++(\*)

Fortran benchmarks:

mpiifort -fc=ifx -lstdc++(\*)

(\*) Indicates a compiler flag that was found in a non-compiler variable.

## Base Portability Flags

613.soma\_s: -DSPEC\_NO\_VAR\_ARRAY\_REDUCE

## Base Optimization Flags

C benchmarks:

-Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512 -fiopenmp  
-ansi-alias

C++ benchmarks:

-Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512 -fiopenmp  
-ansi-alias

Fortran benchmarks:

-Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512 -fiopenmp  
-nostandard-realloc-lhs -align array64byte



# SPEChpc™ 2021 Small Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

## xFusion

SPEChpc 2021\_sml\_base = 1.66

FusionServer 2288H V6 (Intel Xeon Platinum 8380)

SPEChpc 2021\_sml\_peak = 1.75

**hpc2021 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** Oct-2021

## Peak Compiler Invocation

C benchmarks:

```
mpiicc -cc=icx -lstdc++(*)
```

C++ benchmarks:

```
mpiicpc -cxx=icx -lstdc++(*)
```

Fortran benchmarks:

```
mpiifort -fc=ifx -lstdc++(*)
```

(\*) Indicates a compiler flag that was found in a non-compiler variable.

## Peak Portability Flags

```
613.soma_s: -DSPEC_NO_VAR_ARRAY_REDUCE
```

## Peak Optimization Flags

C benchmarks:

```
605.lbm_s: -Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512  
-fiopenmp -ansi-alias
```

```
613.soma_s: Same as 605.lbm_s
```

```
618.tealeaf_s: basepeak = yes
```

```
621.miniswp_s: Same as 605.lbm_s
```

```
634.hpgmgfv_s: -Ofast -ipo -fiopenmp -ansi-alias
```

C++ benchmarks:

```
-Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512 -ffast-math  
-fiopenmp -ansi-alias
```

Fortran benchmarks:

```
619.clvleaf_s: -Ofast -ipo -xCORE-AVX512  
-mllvm -hir-nontemporal-cacheline-count=0 -fiopenmp  
-nostandard-realloc-lhs -align array64byte
```

```
628.pot3d_s: -Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512  
-fiopenmp -nostandard-realloc-lhs -align array64byte
```

(Continued on next page)



# SPEChpc™ 2021 Small Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

xFusion

SPEChpc 2021\_sml\_base = 1.66

FusionServer 2288H V6 (Intel Xeon Platinum 8380)

SPEChpc 2021\_sml\_peak = 1.75

**hpc2021 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2022  
**Hardware Availability:** Apr-2021  
**Software Availability:** Oct-2021

## Peak Optimization Flags (Continued)

635.weather\_s: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/hpc2021/flags/Intel-oneAPI-icx2021-official-linux64.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/hpc2021/flags/Intel-oneAPI-icx2021-official-linux64.xml>

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEChpc2021 v1.0.3 on 2022-07-18 18:15:17-0400.  
Report generated on 2022-08-24 18:41:05 by hpc2021 PDF formatter v1.0.3.  
Originally published on 2022-08-24.