

# MICRO-RAY

## 100 m

Unique  
Technology

SUPER NARROW  
K-BAND

FUZZY LOGIC  
INSIDE

IP-READY PoE

COMPLIANT WITH  
EN50131-1 GRADE 4

100%  
MICROWAVE

THE FIRST BARRIER WITH MICROWAVE RAYS FOR PERIMETER PROTECTION



CIAS RESERVES THE RIGHT TO CHANGE THE SPECIFICATIONS DESCRIBED IN THIS BROCHURE AT ANY TIME WITHOUT PRIOR NOTICE.

EXTREME SECURITY

V 1.3





# MICRO-RAY

100 m



MICRO-RAY is a detection barrier with **linear microwave rays** developed by CIAS laboratories, based on a deep knowledge of microwave technology and signal analysis, coupled with long experience of real-world perimeter requirements. The idea was born from the need for an alternative to infrared rays, which are normally used to protect very narrow corridors, but which by their nature have many limits that can negatively affect performance. Infrared beams are especially vulnerable to climatic conditions such as temperature, glare, solar reflections, fog, and need frequent maintenance such as cleaning of the cover.



PERIMETER PROTECTION OF VILLA, WITH MICRO-RAY IN 3M TOWER CONFIGURATION

## EXTREME WEATHER CONDITIONS



## TOTAL IMMUNITY TO FOG AND SUN

MICRO-RAY is totally immune to the most extreme weather conditions. Its performances, due to the nature of microwave itself, are not influenced by solar glare nor fog. Similarly, car headlights are not affecting it at all, as they would with active infrared in specific circumstances.

## HIGHLIGHTS

Super-narrow ray: 1m corridor

High security: no disqualification

Beam interruption time: from 10ms to 1sec

Low power consumption: no heaters

Maintenance: no cleaning of the cover

Built-in anti-climbing lid


No dead-zone: overlap not required

Paintable cover - no metallic pigments

No synchronism required



IP&PoE

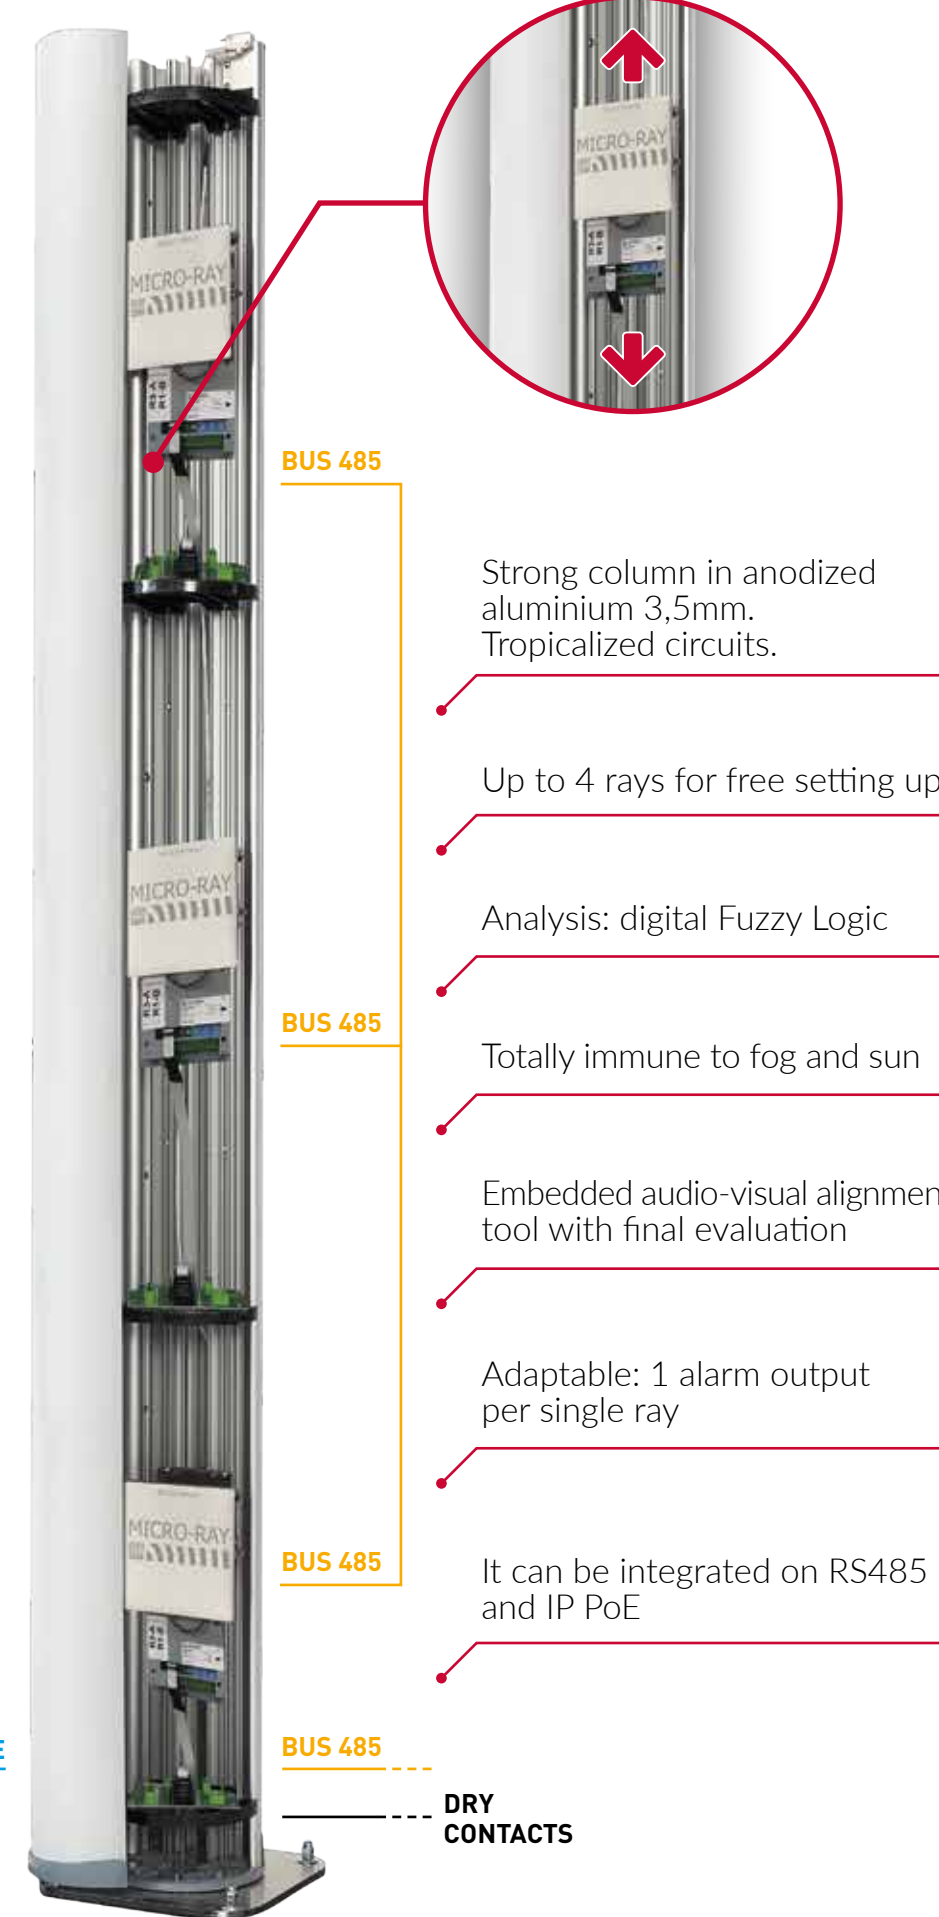

Strong column in anodized aluminium 3,5mm. Tropicalized circuits.

Up to 4 rays for free setting up

Analysis: digital Fuzzy Logic

Totally immune to fog and sun

Embedded audio-visual alignment tool with final evaluation

Adaptable: 1 alarm output per single ray

It can be integrated on RS485 and IP PoE

DRY CONTACTS



INSTALLATION NEAR TO FENCE WITH VEGETATION

ANTICLIMBING APPLICATION WITH 2 RAYS INTO 1M TOWER

## HOW DOES IT WORK?

MICRO-RAY uses special 24Ghz antennas that allow an array of up to 4 independent modules in the same column without interference. These modules create very narrow beams of linear microwave energy, and the **alarm occurs due to their interruption** and NOT through the analysis of the disturbance generated by any movements within the volume, as in classic volumetric microwave barriers. Each module has an independent output with alarm, fault and tamper that **can be connected to any intrusion control panel**. For integrated systems it allows management via RS485 and IP, with a dedicated interface module, and also has the possibility of being fully powered with Power Over Ethernet.


The Fuzzy digital logic applied to each ray makes it possible to manage independently the signal of each ray and obtain the best compromise between proper detection /false alarm.



PARKING AND CAR DEALERS PROTECTION




**MICRO-RAY** provides a linear ray covering a very narrow area, exactly as infrared barriers but without the limits of the latter. The flexibility of application of these revolutionary linear microwave beams, thanks to their detection reliability, total immunity to even extreme weather conditions and reduced power consumption, without the need for a heater, makes this product a unique solution of its kind. Each tower, can be equipped with 1 to 4 microwave rays, independent in alarm management. It can be used in very narrow corridors (minimum 1 m width).

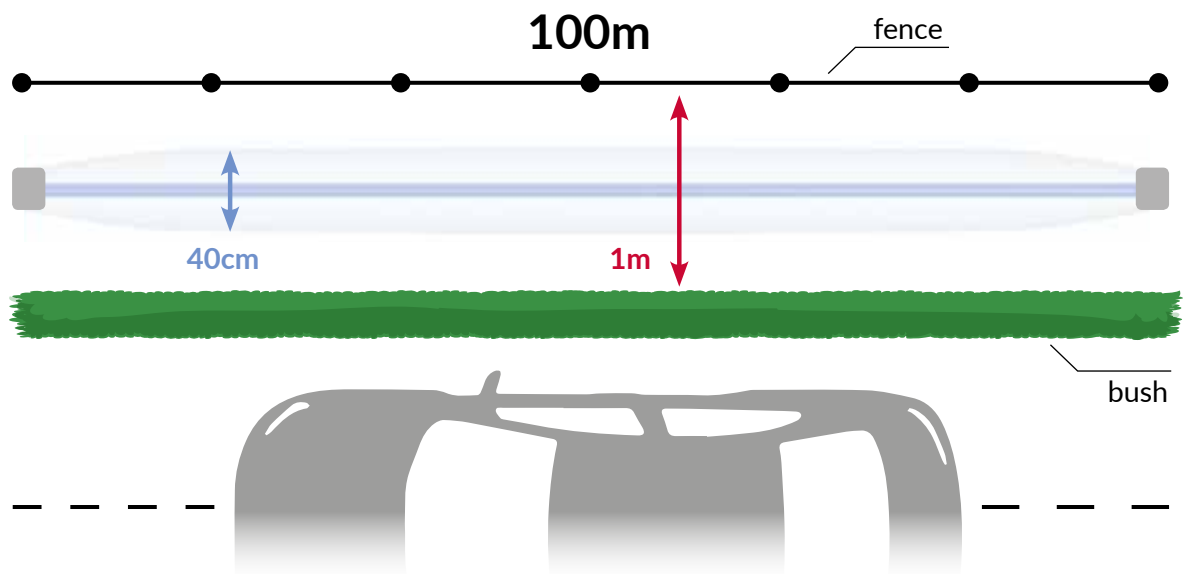

### SCENARIOS AND SPECIAL CONFIGURATIONS


A special feature of MICRO-RAY is that each ray is fully independent and can be freely set up by choosing 1 out of the 5 available scenarios. Furthermore, 5 types of application, 2 environmental disturbance filters and 10 beam interruption times can be selected. This technology is extremely accurate in detecting crawling attempts, discriminating false alarms.

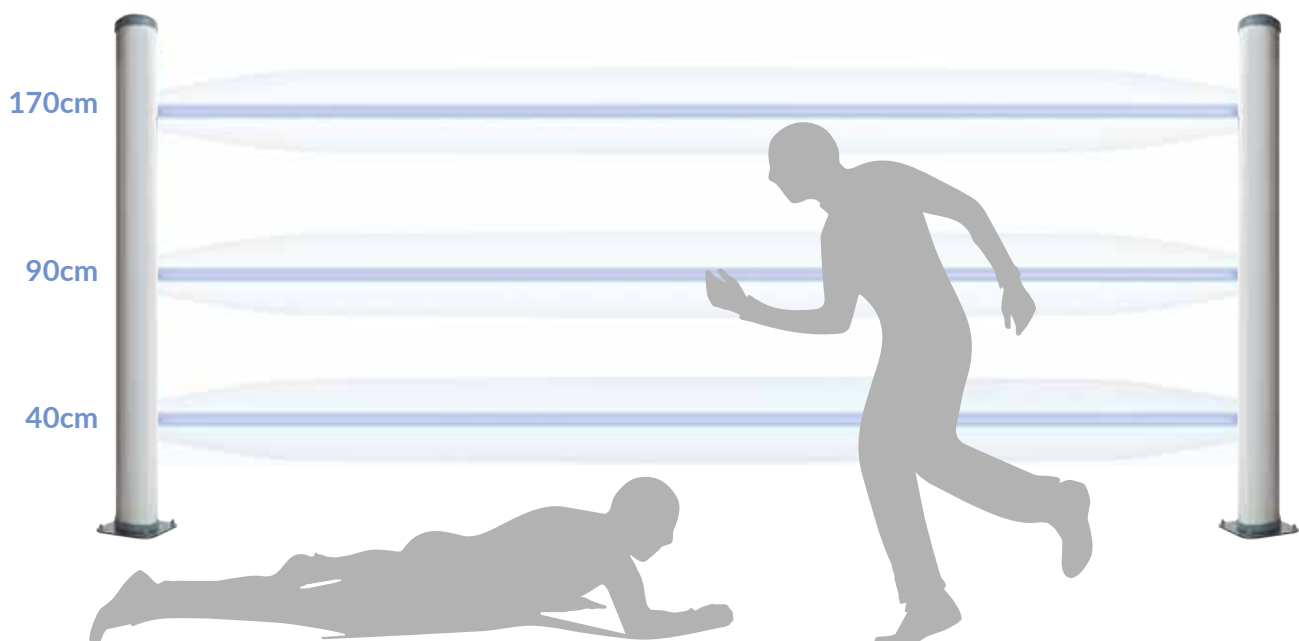

## SPECIFICATIONS

<b>SENSOR TYPE</b>	24Ghz BISTATIC LINEAR MICROWAVE BARRIER
<b>RANGE</b>	100m
<b>MW RAY Ø</b>	40cm (MINIMUM SPACE CLEARANCE REQUIRED 1m)
<b>PROBABILITY OF DETECTION</b>	98%
<b>COMPLIANT WITH</b>	EN50131-1 GRADE 4
<b>SIGNAL ANALYSIS</b>	DIGITAL FUZZY LOGIC
<b>MAX. NUMBER OF RAYS</b>	4 PER COLUMN (SEE INSIDE DIAGRAM)
<b>POWER CONSUMPTION</b>	120mA PER BEAM (TX + RX)
<b>POWER SUPPLY</b>	230Vac/13.8Vdc WITH POWER KIT OR PoE 802.3 AF WITH MICRO-RAY-IP-PoE MODULE (1 PER TOWER)
<b>BEAM INTERRUPTION TIME</b>	FROM 10ms TO 1sec
<b>IP RATING</b>	IP55
<b>OPERATING TEMPERATURE</b>	-35°C +65°C
<b>CONFIGURATION</b>	EMBEDDED ALIGNMENT TOOL
<b>SPECIAL OUTPUTS</b>	RS485 OR IP THROUGH MICRO-RAY-IP-PoE (1 PER COLUMN)
<b>RELAYS OUTPUTS</b>	ALARM/FAULT/TAMPER PER EACH RAY
<b>MTTR (MEAN TIME TO REPAIR)</b>	25 MINUTES
<b>COLUMN RAL</b>	7035
<b>COLUMN Ø</b>	180 mm

## MODULARITY

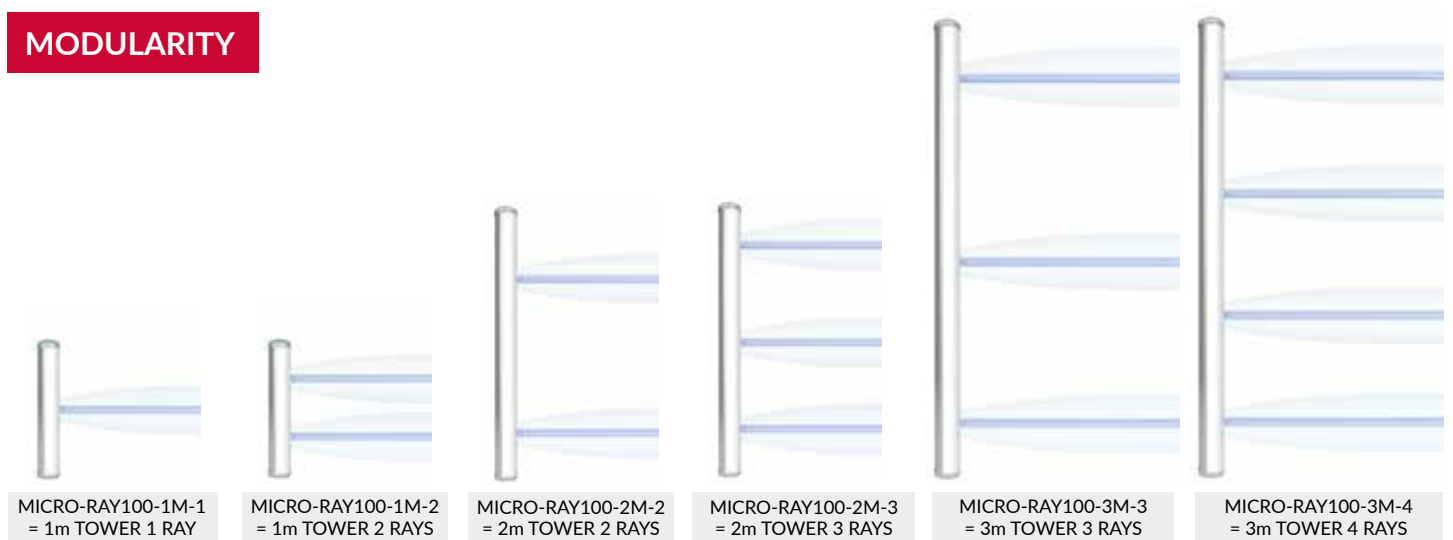

SINCE 1974



CIAS ELETTRONICA S.R.L. | Via Durando, 38 | 20158 Milano | Italy  
t +39 02 3767161 | [www.cias.it](http://www.cias.it) | [info@cias.it](mailto:info@cias.it)

